




# Single Flush Dutch Door

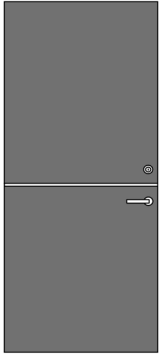

SAMPLE ELEVATION

For additional elevations, see [Doors > Elevations](#)

## Fire Rated Door Options

SIZE	FIRE RATING	MATERIAL	DOOR TYPE	CONSTRUCTION														
				Max. 24 X 24 Listed Louver	10" Min. Bottom Rail	6" Min. Stile & Rail (1, 1-1/2, 3 HR)	3-3/8" Min. Stile & Rail (3/4 HR)	Glass Size per Glass Mfg.	Cladding	Astragal Required	Open Seam	Edge Welded	Polystyrene Core	Temperature Rise Core	Honeycomb Core	Steel Stiffened Core		
48 X 90	3/4 Hour	18 Gauge																
	1 Hour	16 Gauge																
	1-1/2 Hour	14 Gauge																
	3 Hour	14 Gauge																

NOTE: Above door data varies depending on specific design criteria

All Stiles Fire Rated assemblies are built-to-order to your exact specifications. For assistance with design, labeling requirements and multiple integrated features, contact factory.



Steel Door + Window Systems

© 2010 Stiles Custom Metal, Inc. 0710

Stiles Custom Metal Inc  
1885 Kinser Road  
Ceres CA USA 95307

T 209 / 538-3667  
F 209 / 538-2776

[www.stilesdoor.com](http://www.stilesdoor.com)